

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/09/05'		

NOTES:

1.SPECIFICATION

- .CURRENT RATING: 5A Max.
- .DIELECTRIC WITH STANDING VOLTAGE: 500V(AC)
- .CONTACT RESISTANCE: 50mΩ Max.
- .INSULATION RESISTANCE: 1000MΩ(DC)Min



2.PRODUCT NUMBER CODE:

DS1110 - X X X


CONTACT PLATING
6: TIN

COLOR OF HOUSING:
W: WHITE
B: BLACK


No. OF CONTACTS
2 3 4 5 6 7 8 9

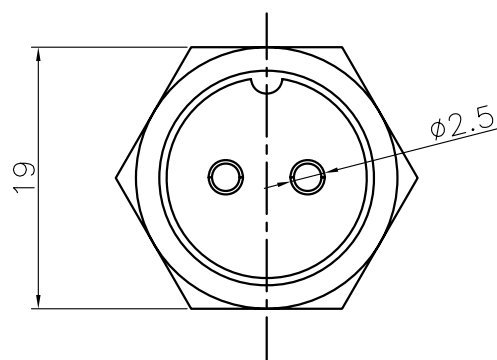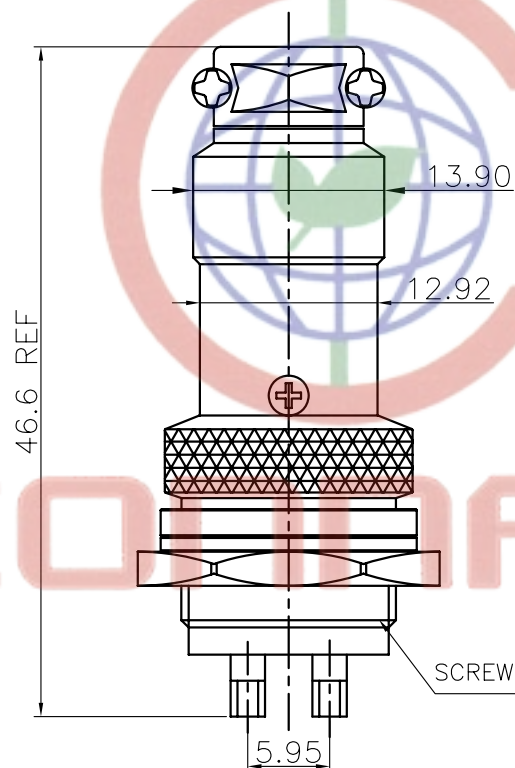


2 PIN




3 PIN




4 PIN




5 PIN




6 PIN



7 PIN



8 PIN



9 PIN

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	MICRO JACK CONNECTOR	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1110 SERIES
.XX	±0.25	.XX	±2°	 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C—DS1110—XXX						

Tel: 86-574-63508187

Fax: 86-574-63510817

E-mail: connfly@cnngin.com.cn

<http://www.cnngin.com.cn>

Address: West Xiaolin Town Cixi Ningbo China

P.C.: 315321